

ALABAMA **DEPARTMENT OF TRANSPORTATION**

AERONAUTICS BUREAU 1409 COLISEUM BOULEVARD MONTGOMERY, ALABAMA 36110 PHONE (334) 242-6820 FAX (334) 353-6540



TRANSPORTATION DIRECTOR

November 2, 2010

Mr. Larry Puckett, Chairman Prattville Airport Authority 143 Grouby Airport Road Prattville, Alabama 36067

Subject:

Annual Inspection Report

Prattville Municipal (Grouby Field) Airport

Dear Mr. Puckett:

An inspection of the Prattville Municipal (Grouby Field) Airport was conducted by personnel of the Alabama Department of Transportation Aeronautics Bureau on November 1, 2010. The purpose of the inspection was to update the information currently on file regarding the airport and to ascertain compliance with the rules and regulations of the Alabama Department of Transportation governing licensed public-use airports within the State of Alabama.

Attached you will find a copy of the Annual Inspection Report for the Prattville Municipal (Grouby Field) Airport. The report shows that all licensing requirements for the airport have been met, and the license is reissued.

If you should have any questions concerning the inspection or corrective actions, please do not hesitate to contact the Aeronautics Bureau at (334) 242-6820.

Sincerely,

John C. Eagerton IV. D.P.A. Chief, Aeronautics Bureau

Copy: Mr. Rans Black, FAA/ADO

Natalie Hobbs, Goodwyn, Mills & Cawood

November 1, 2010

ANNUAL INSPECTION REPORT





PRATTVILLE MUNICIPAL GROUBY FIELD PRATTVILLE, ALABAMA

ANNUAL INSPECTION REPORT PRATTVILLE MUNICIPAL (GROUBY FIELD) AIRPORT PRATTVILLE, ALABAMA

November 1, 2010

TABLE OF CONTENTS

INTRODUCTION	PAGE	1
INSPECTION METHODOLOGY	PAGE	1
LICENSE STATUS	PAGE	2
APPROACH / DEPARTURE PATHS	PAGE	2
PRIMARY SURFACE	PAGE	4
RUNWAY SAFETY AREA	PAGE	4
AIRPORT MARKINGS	PAGE	5
WIND DIRECTION INDICATOR	PAGE	7
AIRPORT LIGHTING	PAGE	8
RUNWAY, TAXIWAY AND APRON CONDITIONS	PAGE	9
FUELING AREA REQUIREMENTS	PAGE	9
PROHIBITED ACTIVITIES	PAGE	10
SUMMARY	PAGE	11
APPENDIX 1	PAGE	12

November 1, 2010

Introduction

<u>Code of Alabama 23-1-357(c)</u>. The department may perform such acts, issue and amend such orders and make, promulgate, or amend general or special rules, regulations, and procedures and establish minimum standards, consistent with the provisions of this article as it shall deem necessary to carry out the provisions of this article and to perform its duties hereunder, all commensurate with and for the purpose of protecting and insuring the general public interest, health, welfare, and safety. (Act 2000-220, 10.)

In accordance with the provisions of the Code of Alabama 23-1-357(c) an inspection of the Prattville Municipal (Grouby Field) Airport was conducted by Mr. Robert K. Heartsill of the Alabama Department of Transportation Aeronautics Bureau on November 1, 2010.

The corrective actions that may be prescribed in this inspection report do not relieve the airport owner from compliance with any other Federal, State or local laws, ordinances or regulations that may be applicable. It is the responsibility of the airport owner to be aware of and obey all Federal, State or local laws, ordinances or regulations that may have a bearing on the corrective actions that may be specified in this report.

The licensing requirements referred to in this report are taken from the Administrative Code of the Aeronautics Bureau of the Alabama Department of Transportation. The Federal requirements are taken from the most recent Airport Layout Drawing completed by Delta Associates and approved in May of 2008.

Inspection Methodology

The inspection of the required State Approach/Departure Path and Federal Runway Protection Zones was accomplished by the use of approved engineering methods and equipment. The angles, locations and heights of trees or other objects within these areas were derived by the use of a Theodolite and electronic distance measuring device.

All other areas of the inspection were conducted visually and photographed for reference purposes.

November 1, 2010

License Status

Code of Alabama 23-1-375(a). ...a person or municipality may not operate an airport, restricted landing area, or other air navigation facility without a license issued by the department.

Based upon the findings of the inspection conducted on November 1, 2010 it was determined that the airport meets the requirements for the issuance of an operating license.

The inspection was conducted on the airport under the provisions of the Administrative Code for the following areas:

1. Approach and Departure Paths
Administrative Code 450-9-1-.12(1)
(See Appendix 1)

State Licensing Standards


- For all hard surface runways the approach and departure path begins 200 feet from the runway end (runway threshold).
- → The approach and departure path for all runways is centered along the extended runway centerline and extends for 1000 feet.
- → The approach and departure path for all runways slopes up at a ratio of 20:1.
- All penetrations of the approach and departure paths, whether natural or manmade, constitute an obstruction to navigation and must be removed.
- → The land beneath the approach and departure path must be controlled by the airport owner. This is accomplished by ownership of the property in fee simple or by written perpetual agreement with the owner of the land.

Inspection Results

- → The Approach and Departure Paths for runways 9 and 27 were inspected and found to meet state licensing standards.
- → The FAA Runway Protection Zones of both runway ends is unobstructed.

November 1, 2010



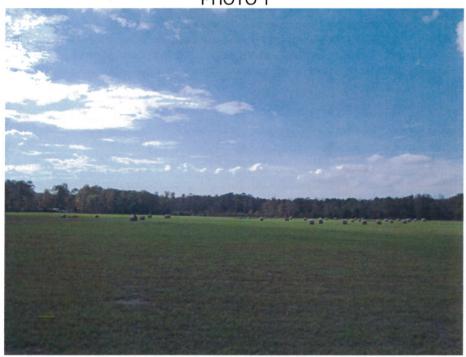

Approach to Runway 9 PHOTO 2



Approach to Runway 27

November 1, 2010

2. Primary Surface Administrative Code 450-9-1-.12(2)

State Licensing Standards

→ Primary Surface (See Appendix 1): The primary surface is 250 feet wide, centered on the runway centerline and extends 200 feet past the end of the marked runway. The primary surface is required to be free of all obstructions, manmade or natural. The only allowable objects are runway lights, guidance signs, or navigation equipment that by function is required to be within the primary surface boundaries.

Inspection Results

→ The Primary Surface was inspected and found to meet state requirements.

3. Runway Safety Area Administrative Code 450-9-1-.12(3)

State Licensing Standards:

Runway Safety Area (Appendix 1): All runways are required to maintain an obstruction free area adjacent to each runway. This area is 120 feet wide, centered on the runway centerline, and extends for a distance of 200 feet past the runway end. The area must be compacted and graded smooth with no ruts, humps, depressions or other potentially hazardous surface variations. The slope along the longitudinal centerline shall not exceed a rise or fall of three percent in elevation relative to the runway end elevation. The lip from the top of the pavement to the grade adjacent to the runway should not exceed 3 inches.

Inspection Results

→ The Runway Safety Area was found to be in compliance with the State's licensing standards.

November 1, 2010

4. Airport Markings Administrative Code 450-9-1-.12(4)

State Licensing Standards

Airport Markings: All runways are required to be marked in a manner identifying the boundaries of the landing areas. The runway markings must be painted white and be maintained in a legible condition.

Inspection Results

- → The runway identifier markings of Runway 9 are in POOR condition.
- → The runway identifier markings of Runway 27 are in POOR condition.
- → The aiming bars of Runway 9 are in POOR condition.
- → The aiming bars of Runway 27 are in POOR condition.
- → The runway centerline is in POOR condition.

Required Action

→ Plans for the remarking of the runway should be formulated. The runway will need to be remarked in the near future.



Runway 9 identifier markings in POOR condition

November 1, 2010

PHOTO 4



Runway 9 aiming point markings in POOR condition PHOTO 5



Runway 27 identifier markings in POOR condition

November 1, 2010



Runway 27 aiming bar in POOR condition

5. Wind Direction Indicator Administrative Code 450-9-1-.12(5)

State Licensing Standards

Wind Direction Indicators: All airports are required to have an operational wind direction indicator. It must be installed in a highly visible area and free from obstructions to ensure true wind direction and velocity. Night operations require the indicator be lighted.

Inspection Results

→ The wind direction indicator (windsock) was operational.

November 1, 2010





Windsock Assembly

6. Airport Lighting Administrative Code 450-9-1-.12(6)

State Licensing Standards

Airport Lighting: Runway lights and a lighted wind direction indicator are required for night operations. An airport rotating beacon is suggested. All runway, threshold, and taxiway lighting shall be maintained in operational condition and shall not be obscured by natural growth such as grass and/or weeds.

Inspection Results

- → The airport lighting system was inspected and found to be operational.
- → The PAPI for Runway 9 is out of service due to improper siting.

November 1, 2010

Required Action

→ The PAPI unit should be sited as required to provide a visual clue to pilots of an unobstructed approach to the runway. The NOTAM that is currently in effect must remain until the PAPI has been properly sited and flight checked.

7. Runway, Taxiway and Apron Conditions Administrative Code 450-9-1-.12(7)

State Licensing Standards

Runway, Taxiway and Apron Conditions: All airport pavement surfaces associated with aircraft operations must be kept smooth and free of any defect or obstruction that could damage an aircraft. The lip of the airport pavement surfaces must not exceed three (3) inches in elevation from the top of the pavement to the shoulder. The drop should only be enough to allow sufficient drainage and not pose a control problem for aircraft exiting the runway. The aircraft parking apron is for the operation and parking of aircraft only and should be smooth and free of obstructions or defects that could cause damage to aircraft during operations.

Inspection Results

→ The airport pavement surfaces were inspected and found to be in good condition.

8. Fueling Area Requirements Administrative Code 450-9-1-.12(8)

State Licensing Standards

- → Signs should be posted prohibiting open flames or smoking in fueling areas. The fueling facility must be labeled indicating the type fuel being dispensed.
- → Grounding cables must be available.
- A fire extinguisher approved for the purpose of extinguishing petroleum product fires available during all fueling operations.
- → Serviceable hoses and connections that would preclude a rupture or leaking of fuel.

November 1, 2010

Inspection Results

The fueling area meets the requirements established by the Alabama Department of Transportation. However, the State of Alabama Department of Agriculture and Industries may have additional requirements for fueling systems that were not considered during this inspection.



Fuel tanks and card reader

9. Prohibited Activities Administrative Code 450-9-1-.16

State Licensing Standards

→ Prohibited Activities: The use of any portion of the aircraft operations area, or airport property within the boundaries of the imaginary surfaces of a licensed airport for any purpose other than the operation of aircraft shall be deemed a non-aeronautical activity and is prohibited.

Inspection Results

→ During the inspection there was no evidence of any prohibited activities.

November 1, 2010

Summary

The table below summarizes items noted in this report.


INSPECTION SUMMARY


Inspection Area	Violation/Maintenance	Corrective Action
Airport Markings	Maintenance	Remark runway in accordance with FAA AC150/5340-1J "Airport Markings"
Airport Lighting – PAPI unit of Runway 9	Maintenance	Adjust visual angle to provide a clear unobstructed path. NOTAM condition.

Please contact the Aeronautics Bureau of the Alabama Department of Transportation at (334) 242-6820 with questions concerning the Annual Inspection Report.

November 1, 2010

Approach and Departure Path Dimensions				
Inner	Outer			
Width	Width	Length	Acreage	
250 Feet	450 Feet	1,000 Feet	8.04 Acres	
Primary Surface Dimensions				
250 Feet Wide Centered Along Runway Centerline				
Extending 200 Feet Past the Runway End				
Runway Safety Area Dimensions				
120 Feet Wide Centered Along Runway Centerline				
Extending 200 Feet Past the Runway End				

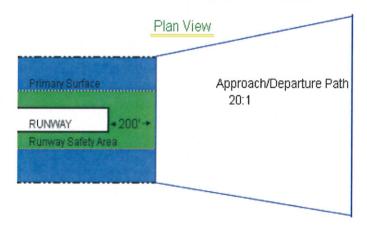

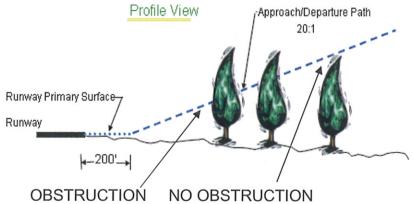

APPENDIX 1